



NVC®


Office Lighting

Office Lighting

S9772 Series




Dimensions

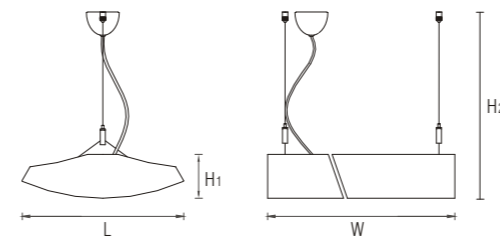

Lamp Rating	L	W	H1	H2
2x28W/2x54W	1197	222	60	1500
4x28W/4x54W	1197	222	60	1500

Dimensions in mm

Photometric Data

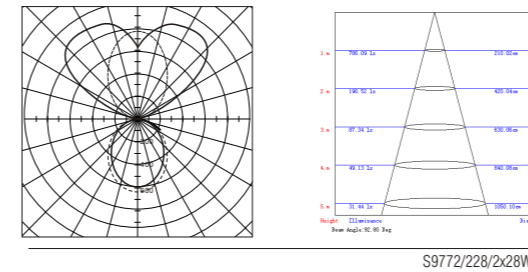

Color:



Matt Silver

K31 NVC color code

Description

Suspended fittings for T5 linear fluorescent tubes with aluminum housing in silver powder coated finish providing wonderful direct/indirect illumination. An excellent constituent of office lighting design.

Construction

- Body – Extruded aluminum body in silver powder coated finish
- Diffuser – UV stable acrylic (PMMA) diffuser, anti-dust
- Supplied complete with suspension wires; work with all kinds of ceiling types

Specification

- For T5 linear fluorescent tubes (not included)
- Supplied including high-frequency electronic ballast

Applications

- Offices
- Conference rooms
- Reception areas
- Call centres
- Universities, schools and collages
- Retail

Model	Input	Lamp	Weight	Quantity/CTN	CTN Dimension
S9772/228/2x28W	220~240V 50/60Hz	T5 2x28W	3.6KG	1 PC	1395x290x130mm
S9772/254/2x54W	220~240V 50/60Hz	T5 2x54W	4.0KG	1 PC	1395x290x130mm
S9772/428/4x28W	220~240V 50/60Hz	T5 4x28W	4.5KG	1 PC	1395x290x130mm
S9772/454/4x54W	220~240V 50/60Hz	T5 4x54W	4.7KG	1 PC	1395x290x130mm



S9772/228/2X28W
S9772/254/2X54W




S9772/428/4X28W
S9772/454/4X54W

Office Lighting

S9773 Series




Dimensions

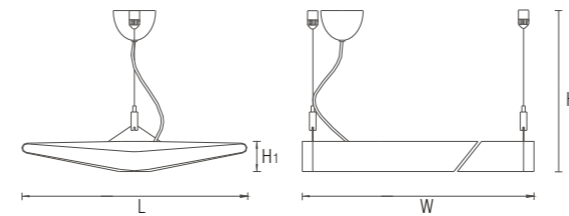

Lamp Rating	L	W	H ₁	H ₂
2x28W/2x54W	1202	344	46	1500
4x28W/4x54W	1202	344	46	1500

Dimensions in mm

Photometric Data

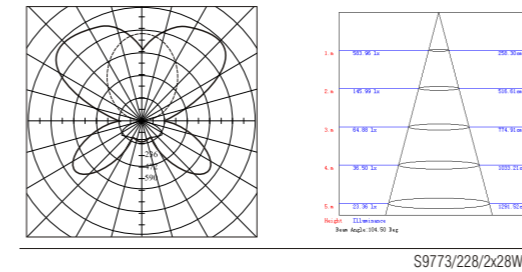

Color:



Description

Suspended fittings for T5 linear fluorescent tubes with aluminum housing in silver powder coated finish providing wonderful direct/indirect illumination. An excellent constituent of office lighting design.

Construction

- Body – Extruded aluminum body in silver powder coated finish
- Diffuser – UV stable acrylic (PMMA) diffuser, anti-dust
- Supplied complete with suspension wires; work with all kinds of ceiling types

Specification

- For T5 linear fluorescent tubes (not included)
- Supplied including high-frequency electronic ballast

Applications

- Offices
- Conference rooms
- Reception areas
- Call centres
- Universities, schools and collages
- Retail

Model	Input	Lamp	Weight	Quantity/CTN	CTN Dimension
S9773/228/2x28W	220~240V 50/60Hz	T5 2x28W	4.3KG	1 PC	1385x410x105mm
S9773/254/2x54W	220~240V 50/60Hz	T5 2x54W	4.5KG	1 PC	1385x410x105mm
S9773/428/4x28W	220~240V 50/60Hz	T5 4x28W	5.1KG	1 PC	1385x410x105mm
S9773/454/4x54W	220~240V 50/60Hz	T5 4x54W	5.3KG	1 PC	1385x410x105mm



S9773/228/2X28W
S9773/254/2X54W




S9773/428/4X28W
S9773/454/4X54W

Office Lighting

S9774 Series




Dimensions

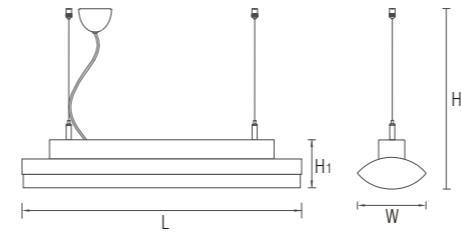

Lamp Rating	L	W	H1	H2
2x28W	1282	120	82	1500
2x54W	1282	120	82	1500

Dimensions in mm

Photometric Data

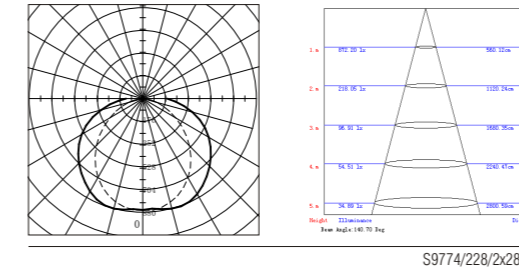

Color:



K31 NVC color code

Description

Suspended fittings for T5 linear fluorescent tubes with aluminum housing in silver powder coated finish providing wonderful direct illumination. An excellent constituent of office lighting design.

Construction

- Body – Extruded aluminum body in silver powder coated finish
- Diffuser – UV stable acrylic (PMMA) diffuser, anti-dust
- Reflector – Aluminum reflector in polished specular finish
- Supplied complete with suspension wires; work with all kinds of ceiling types

Specification

- For T5 linear fluorescent tubes (not included)
- Supplied including high-frequency electronic ballast

Applications

- Offices
- Conference rooms
- Reception areas
- Call centres
- Universities, schools and collages
- Retail

Model	Input	Lamp	Weight	Quantity/CTN	CTN Dimension
S9774/228/2x28W	220~240V 50/60Hz	T5 2x28W	14.3KG	1 PC	1450x335x425mm
S9774/254/2x54W	220~240V 50/60Hz	T5 2x54W	14.7KG	1 PC	1450x335x425mm